



ISO 9001:2008 CERTIFIED



S. P. COLOR ROOFINGS INDIA



BUILDING EXAMPLE

Manufacturers of :
Colour Coated Metal Roofing & Metal Building Systems

- ◆ Ready Stock ◆ Wide Product Range
- ◆ Cost Effective ◆ Custom Designed ◆ Attractive Colours



Our Plant

*We, **S. P. Color Roofings India**, introduce ourselves as an organization dedicated to Colour Coated Metal Roofing & Wall Cladding Systems for over a decade.*

*We offer the most suitable, complete and cost effective solutions from **Designing, Manufacturing, Supply & Installation** for all the roofing needs of the clients. We are into manufacturing of :*

- ◆ Galvalume & Galvanized Colour Coated Sheets in different profiles.
- ◆ Cee & Zed Purlins.
- ◆ Metal Decking Sheets
- ◆ Polycarbonate Profile Sheets

We provide different profile range with various matching accessories like- Roof Ridges, Flashings, Rain Water Gutters, Louvers, Screws, Ventilators & many more.

We aim at providing our clients with the most trusted Colour Coated Roofing Solutions for all types of purpose whether industrial, domestic, commercial, sports or for any other use.


We have highly skilled & professional team with sophisticated infrastructure unit that uses advance machinery, hi-tech technology, technical knowledge & practical experience to fulfill various needs of the clients and therefore hold a strong reputation in the market.

Quality is the key to our Success




ISO 9001:2008 CERTIFIED

Rib Profile

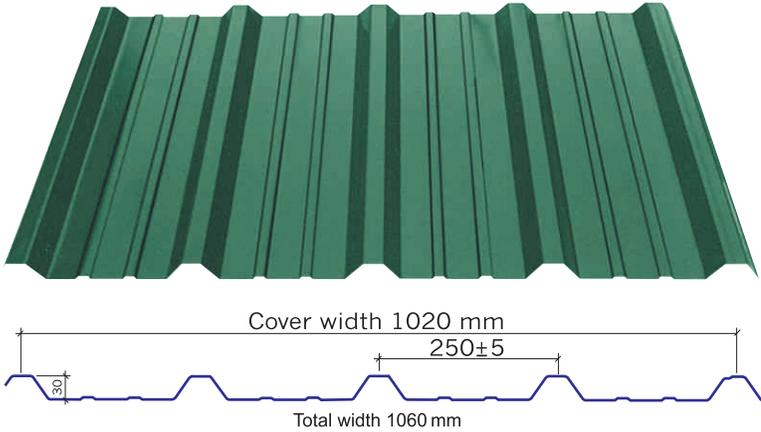


- ★ Economically excellent providing aesthetic look to the building.
- ★ Pitch 250 mm, Crest height 30 mm.
- ★ Total width 1060 mm & covered width 1020 mm (+/- 10 mm).
- ★ Thickness 0.40 mm to 0.65 mm.
- ★ Length available upto 12 meters.

Clad Profile

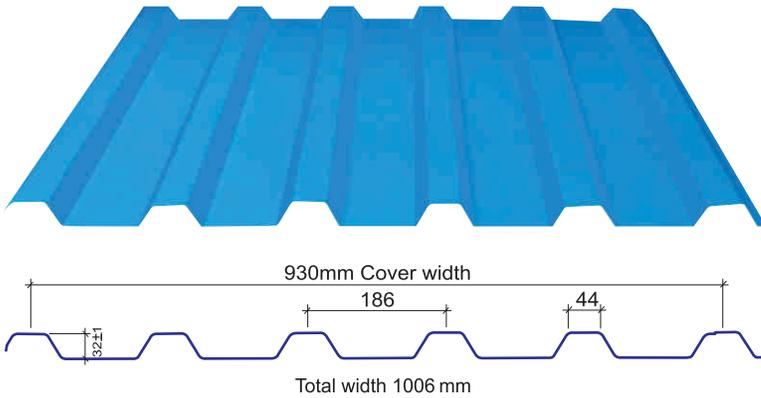

- ★ Strongest profile providing aesthetic look to the building.
- ★ Pitch 186 mm, Crest height 32 mm.
- ★ Total width 1006 mm & covered width 930 mm (+/- 10 mm).
- ★ Thickness 0.40 mm to 0.65 mm.
- ★ Length available upto 12 meters.

Standing Seam Profile

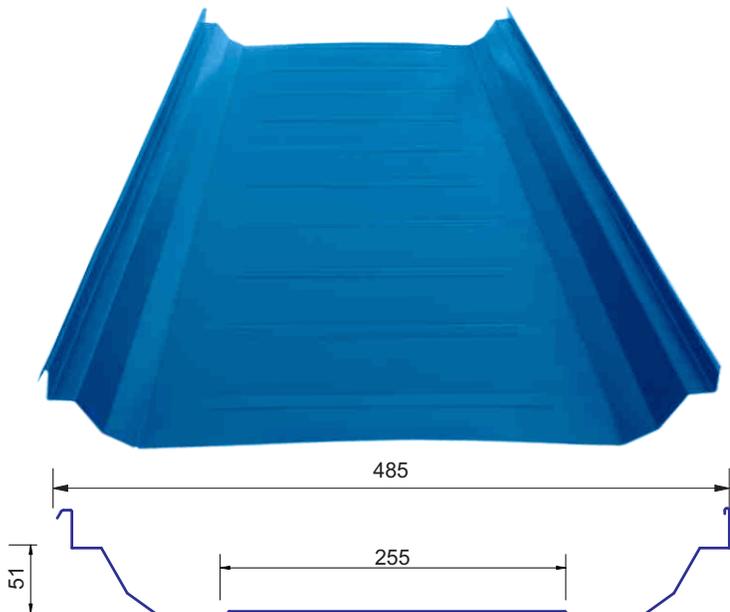

- ★ Long lasting, Screw less profile, Concealed clip installation system gives the utmost aesthetic look.
- ★ Pitch 215 mm, Crest height 51 mm.
- ★ Total width 485 mm & covered width 465 mm.
- ★ Thickness 0.50 mm to 0.60 mm.
- ★ Length available upto 12 meters.




Seamer Machine



Clip with SS tab


All dimensions are in millimeters

Rib Tile

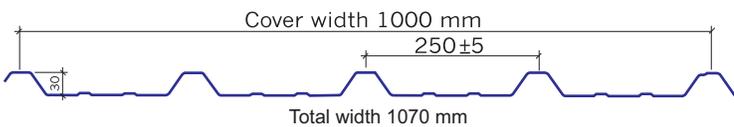

- ★ Architecturally attractive adding to the aesthetic look of the building.
- ★ Pitch 250 mm, Crest height 30 mm.
- ★ Total width 1070 mm & covered width 1000 mm.
- ★ Thickness 0.40 mm to 0.50 mm.
- ★ Length available upto 6 meters for easy transportation & installation.
- ★ Available in pre-painted galvanized steel.

Wave Tile

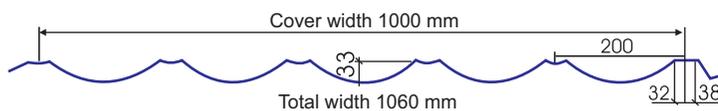

- ★ Gives aesthetically beautiful looks to the building.
- ★ Pitch 200 mm, Crest height 33 mm.
- ★ Total width 1060 mm & covered width 1000 mm.
- ★ Thickness 0.40 mm to 0.50 mm.
- ★ Length available upto 6 meters for easy transportation & installation.
- ★ Available in pre-painted galvanized steel.


Base Steel		Metallic Coating	Color Coating	Weight (kg/m ²)		
Strength (Mpa)	Thickness (TCT) mm			Clad 930 / 980mm cover width	Rib 1020 mm cover width	Clip Lock 430mm cover width
G550 High Tensile	0.47	Zinc Aluminium Alloy Coated AS 1397	Bare-Al Zn	4.57 / 4.25	4.20	4.95
	0.50			4.86 / 4.52	4.45	5.25
	0.55		Polyester Super	5.34 / 4.97	4.90	5.75
	0.60			5.84 / 5.42	5.35	6.30
G300/240	0.50	Galvanized IS 277	Polyester	5.07 / 4.72	4.60	5.35
	0.55		PVDF	5.58 / 5.18	5.05	6.03
	0.60			6.08 / 5.65	5.57	6.48

*Pre Painted Galvanized : with polyester paint coating of 15 to 18 microns on top & 7 to 8 micron on bottom with 100 gsm/Sqm Zinc Coating on both sides.

*Bare Galvalume : without colour with metallic coating of 150 gsm/sqm of Aluminium 55%, Zinc 43.4% & Silicon 1.6%.


*Pre painted Galvalume : with SMP & RMP paint coating of 15 to 18 microns on top & 7 to 8 micron on bottom with metallic coating of 150 gsm/sqm of Aluminium 55%, Zinc 43.4% & Silicon 1.6%.

44/130 mm Steel Decking Sheet

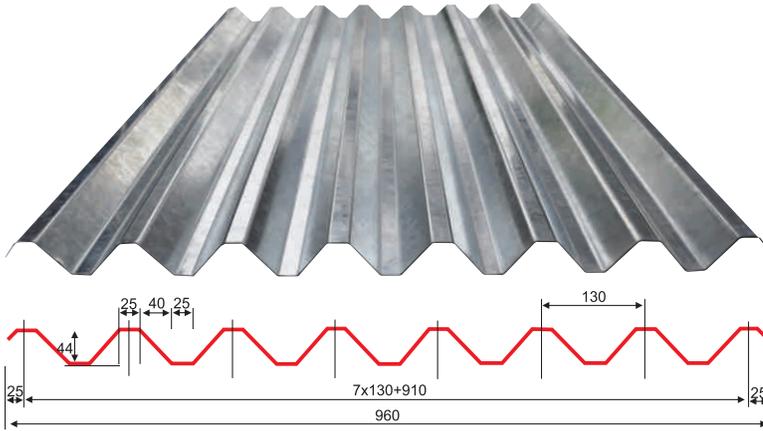


- ★ Economical, big time saving & reduces weight of concrete floor by 50%.
- ★ Pitch 130 mm & Crest height 44 mm.
- ★ Total width 960 mm.
- ★ Thickness 0.80 mm, 1 mm, 1.2 mm & 1.5 mm.
- ★ Length available upto 12 meters subject to transport restrictions.
- ★ Available in galvanized & colour coated galvanized steel.


44/130 mm Steel Emboss Decking Sheet

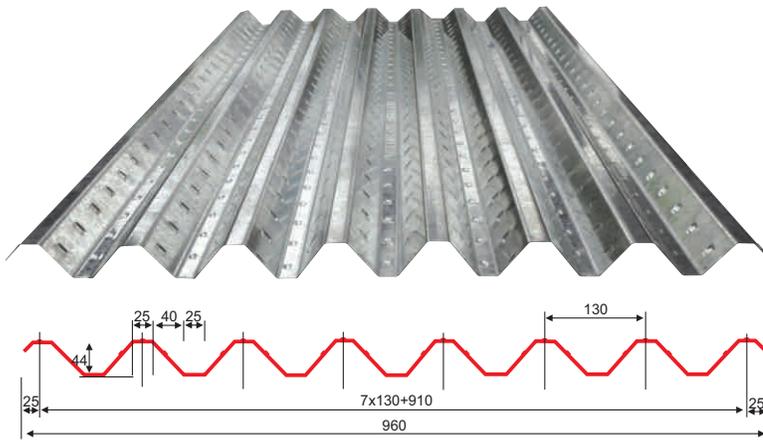


- ★ Special Embossments are available in decking sheets to create the highest bond between concrete & the steel floor.

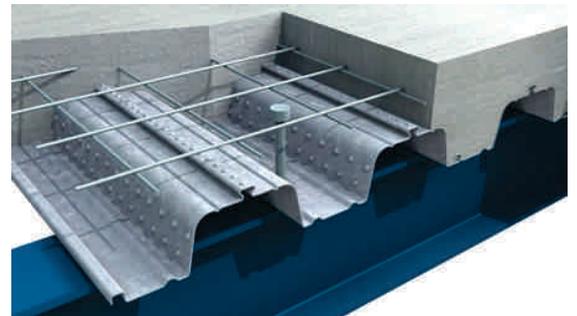

51/720 mm Steel Decking Sheet


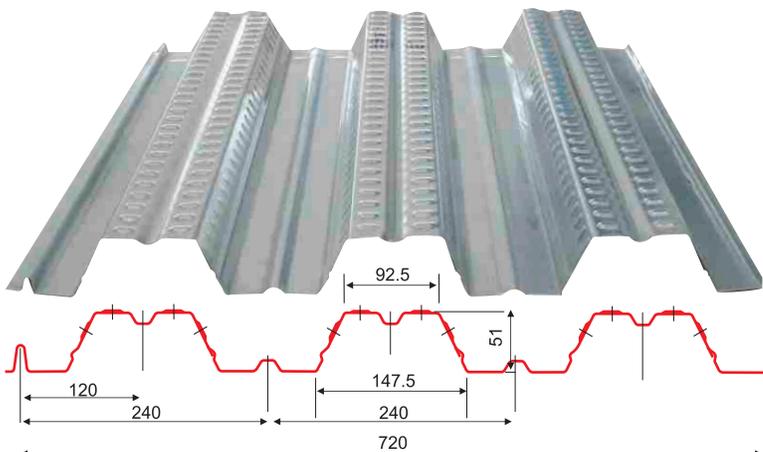


- ★ Economical, big time saving & reduces weight of concrete floor by 50%.
- ★ Pitch 240 mm & Crest height 51 mm.
- ★ Total width 720 mm.
- ★ Thickness 0.80 mm, 1 mm & 1.2 mm.
- ★ Length available upto 12 meters subject to transport restrictions.
- ★ Available in galvanized & colour coated galvanized steel.

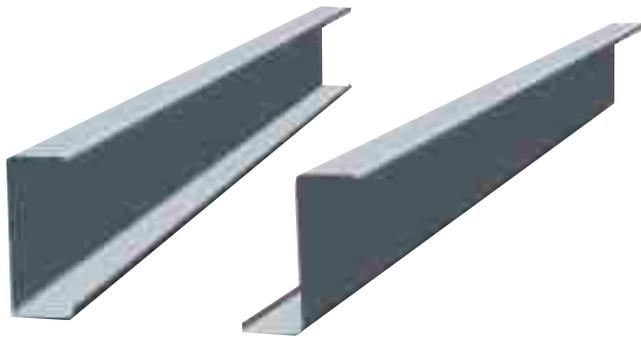

Cee

Zed

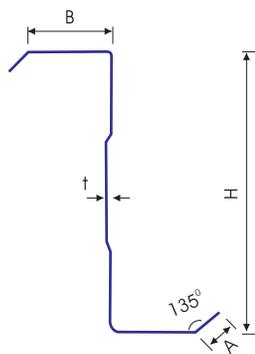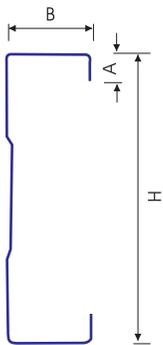


- ★ Up to 40% savings in steel.
- ★ Up to 30% savings in construction costs .
- ★ Light weight.
- ★ Easy to transport and handle.
- ★ Supplied in exact length and pre-punched holes.
- ★ Reduced fabrication cost.
- ★ Ability to span long lengths.
- ★ Close tolerances on sectional dimensions due to process of cold roll forming.
- ★ Fast erection.
- ★ No site drilling or cutting required.

SPECIFICATION


H	B	A	t
80	45	15	1.6~2.0
100	45	15	1.6~2.0
100	50	20	1.6~2.0
120	50	20	2.0~2.5
120	60	20	2.0~2.5
140	50	20	2.0~2.5
140	60	20	2.0~2.5
160	60	20	2.0~2.5
160	70	20	2.0~2.5
180	60	20	2.0~2.8
180	70	20	2.0~2.8
200	70	20	2.0~2.8
200	80	20	2.5~3.0
220	70	20	2.5~3.0
220	80	20	2.5~3.0
250	70	20	2.5~3.0
250	80	20	2.5~3.0
300	70	20	2.5~3.0
300	80	20	2.5~3.0

SYSTEM OF CONNECTIONS


There are three systems of connections based on design of purlin and its connections :

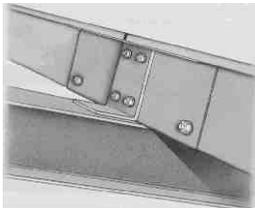

Sleeve Connection


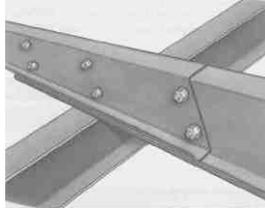


Overlapping

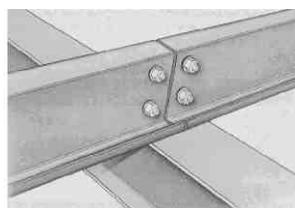

Butt Connection

Wall Louvers

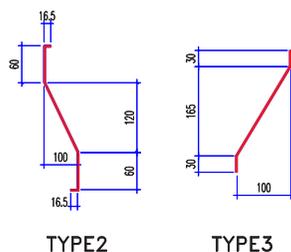

- ★ It has excellent water and dust resistance.
- ★ Easy Installation and Maintenance free.
- ★ Technically designed available in customized lengths.
- ★ The Louvers allow fresh air to come inside and prevent the entry of dust and rain water.
- ★ Removes dampness and humidity.
- ★ 24 Hours fresh air keeps workers active & healthy.
- ★ Comes in Galvanized, Galvalume coated Sheets.
- ★ No Operational Costs.
- ★ Reduced Power Costs.
- ★ Reduced Maintenance Costs.

NATURAL VENTILATION SYSTEM

ROOF VENTILATOR




- ★ 300/500/600 diameters available in aluminium & stainless steel.
- ★ Roof vent base available in Polycarbonate & FRP profile sheet of thickness 2 mm.
- ★ Benefits includes no operation cost, reduced power cost, reduced maintenance & installation.

NATURAL LIGHT SOLUTIONS



- ★ Available in Polycarbonate & FRP Sheets.
- ★ Both are available in matching profiles of metal roof sheets.
- ★ Polycarbonate sheets are UV coated that increases the life span of sheets.
- ★ Polycarbonate sheets available in clear & embossed forms that protects from direct sunlight.
- ★ Thickness : 1 mm to 3 mm.

CRIMPING PROFILE SHEET

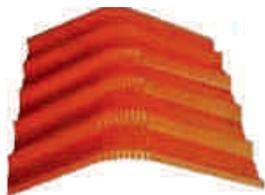

Ridge Cap



Full Curve




Half Curve



Front Curve

ACCESSORIES


Flashings, Ridge Covers, Rain Water Gutters, Down pipes available in PPGI, PPGL & GI material.

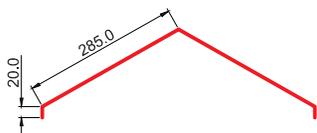


RIDGE CAP





RIDGE CAP




GABLE FLASHING




EXTERNAL CORNER



INTERNAL CORNER




CANOPY FLASHING



FRAMED OPENING FLASHING

MAKE AS PER PIPE



DOWN TAKE COVER/PIPE



EAVES GUTTER



VALLEY GUTTER



BOX GUTTER

COLOUR SHADES



BARE ZINCALUME



TORRES BLUE



DARK GREY



LIGHT GREEN



OFF WHITE



DARK BLUE



LIGHT GREY



DARK GREEN



BEIGE



SKY BLUE




BRICK RED



AUTUM RED

*For actual shades please refer Coloured Steel Sample

Pre Engineered Buildings

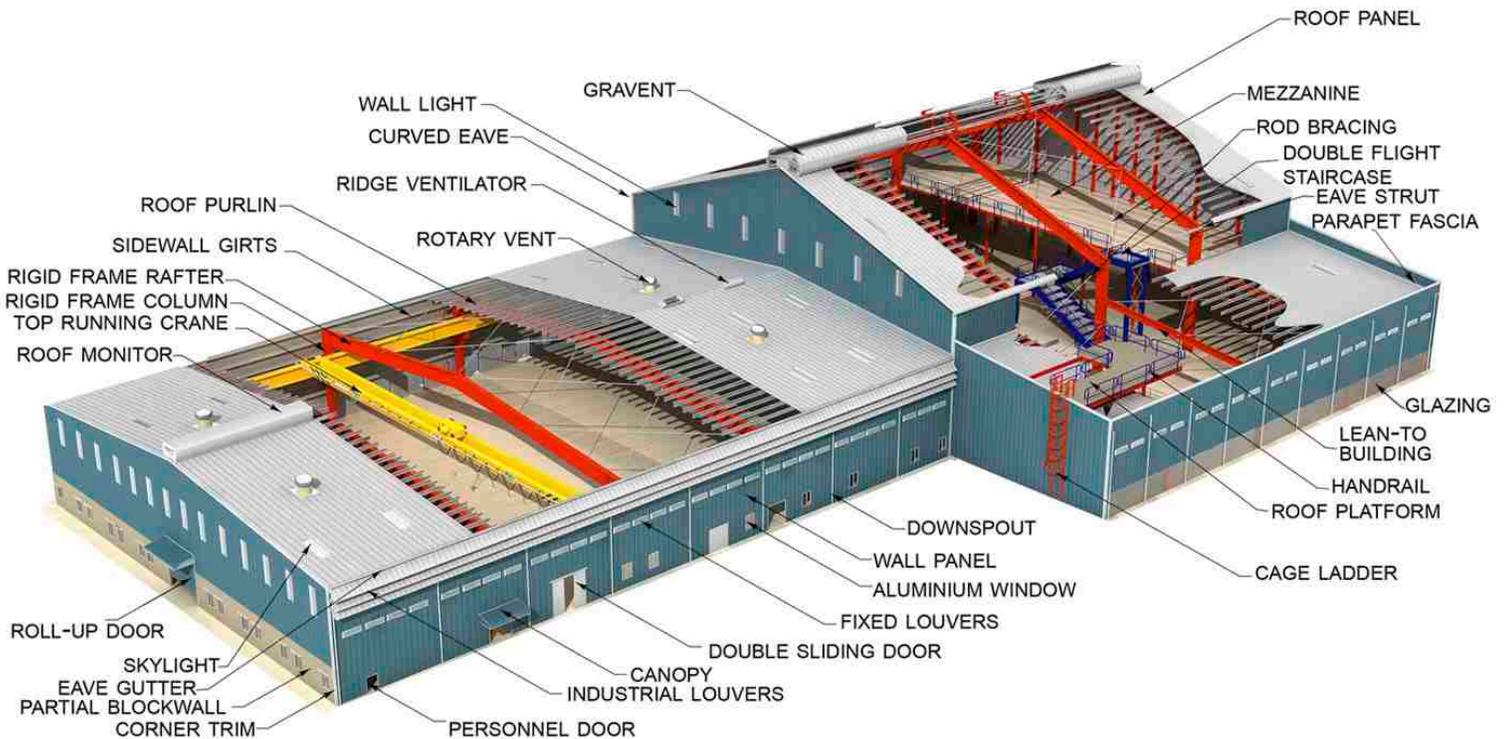

S. P. COLOR ROOFINGS INDIA

PLOT NO. : 2191, PHASE-II, SEC-38, HSIIDC INDUSTRIAL ESTATE, RAI - 131029, DIST. SONEPAT, HARYANA.

T : 0130 - 2366098, 2366099 M : 9911550006, 8901516099 E : contact@spcri.in W : www.spcri.in